

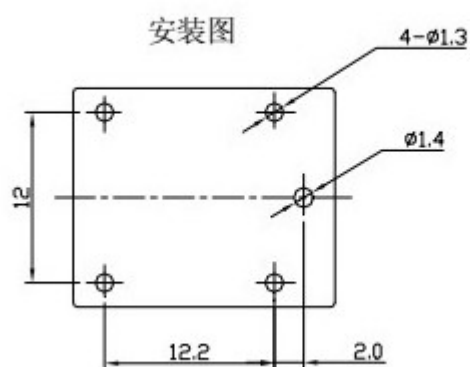
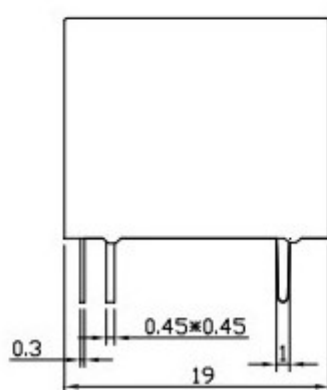



外形尺寸安装孔位图

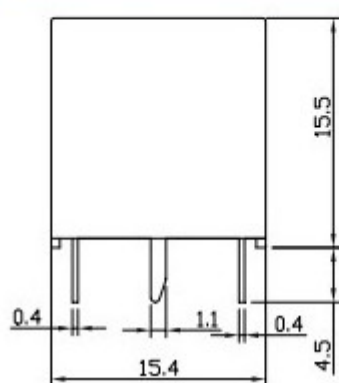

接线图



Form C



Form A

产品详细参数

■COIL DATA 线圈参数 (at 20℃)

Nominal Voltage额定电压(VDC)	3	5	6	9	12	18	24	48	0.36W
Coil Resistance线圈阻值 ($\Omega \pm 10\%$)	25	69	100	225	400	900	1600	6400	
Rated Current额定电流(mA)	120	71.4	60	40	30	20	15	7.5	
Max Operate Voltage 最大吸合电压(VDC)	2.25	3.75	4.5	6.75	9	13.5	18	36	
Min Release Voltage最小释放电压(VDC)	0.15	0.25	0.3	0.45	0.6	0.9	1.2	2.4	
Max Applicable Voltage 最大过载电压	70℃时额定电压的130%，23℃时额定电压的170%								

■CONTACT DATA 触点参数

Contact Form触点形式	1H/1Z	
Contact Material触点材料	Silver Alloy	
Load负载	Resistive load(COS $\Phi=1$)	
Contact Ratings触点负载	1H:10A 240VAC 12A 120VAC	1Z: 7A 240VAC 10A 120VAC
Minimum load 最小负载	100mA 5VDC	
Max Switching Voltage最大转换电压	250VAC/30VDC	
Max Switching Current最大转换电流	15A	
Max Switching Power 最大转换功率	2770VA/240W	
Contact Resistance接触电阻	100m Ω Max at 6VDC 1A	
Life Expectancy寿命	Electrical 电气寿命: 100,000 Operations(at30Operations/minute)	
	Mechanical机械寿命: 10,000,000 Operations(at300Operations/minute)	