

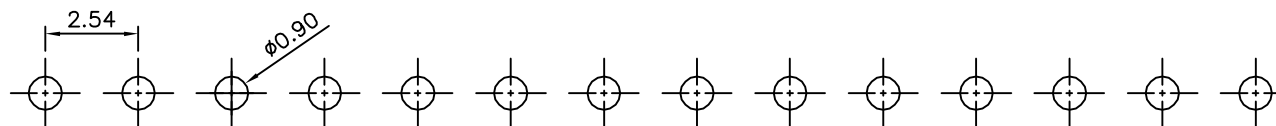



△△ SPECIFICATION

Current Rating:3 Amps/Contact Max.
Contact Resistance:4 Milliohms/Contact Max.
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Voltage:60V AC/DC
Average Insertion Force With Steel Pin Of
 $\phi 0.43\text{mm}$:<250g
Average Withdrawal Force With Steel Pin Of
 $\phi 0.43\text{mm}$:>90g Min.
Mechanical Life Cycle:200 Min.
Operation Temperature:Gold Plated:-55°C~+105°C
Tin Plated:-40°C~+105°C
Soldering Temperature:+260°C,10s Max.
Pin(Outer Sleeve):Brass,Machined CuZn38Pb2
Tin Plated Over Nickel
Clip(Contact 4 Finger):Beryllium Copper,Heat Treated
Gold Plated Over Nickel
Insulator(Housing):PPS(UL94V-0),Black
RoHS Compliant

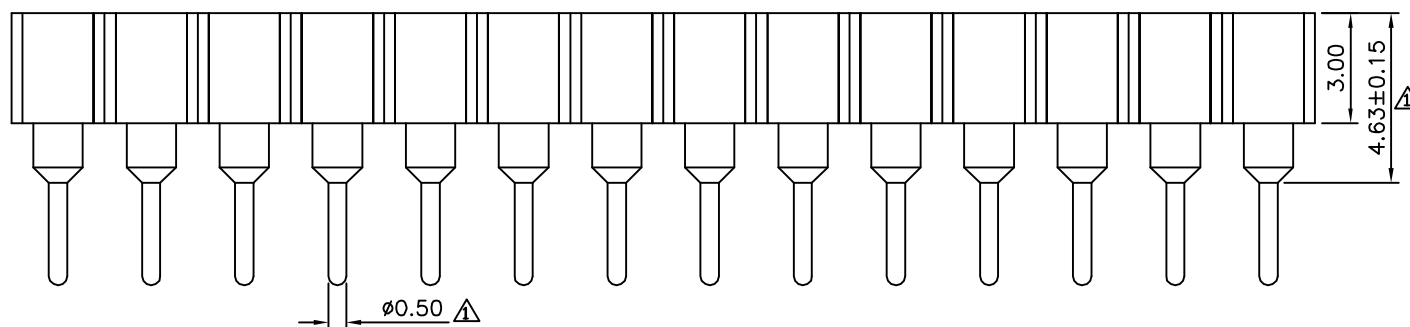

△ Recommended P.C.B. Layout

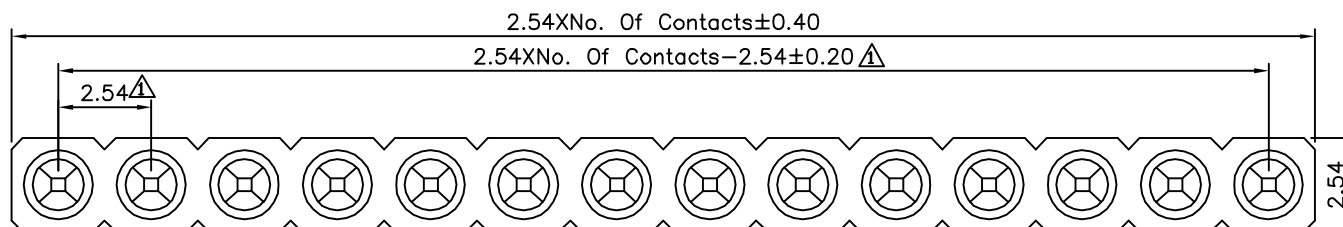

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

05957

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


WZL

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.50
XX ± 0.30
XXX ± 0.20
XXX ± 0.10
ANG. $\pm 5^\circ$

UNIT
mm

	A2	Modify Data	HZF	03/14/2011
	A1	Modify Data	HZF	07/30/2009
	A0	NEW RELEASE	HZF	07/11/2005
NO	REV	REVISIONS	CHK	DATE